

Equipment Rules of Sailing

F.2.3 (e) Rigging Point

A submission from the Equipment Committee, Classes
Committee and 420 Class

Purpose or Objective

To remove obsolete examples from the definition and amend the drawing accordingly to match the text.

Proposal

F.2.3 Mast Dimensions

(e) RIGGING POINT


When **rigging** is attached:

BY HOOK TERMINAL: The lowest point of the hook where it intersects the **spar**, extended as necessary.

BY TANG WITH THROUGH FIXING: The lowest point of the **spar** through fixing where it intersects the **spar**.

~~**BY EYE WITH BOLT OR OTHER THROUGH FIXING:** The lowest point of the **spar** bolt, or through fixing, where it intersects the **spar**.~~

IN OTHER WAYS: The intersection of the outside of the **spar**, extended as necessary, and the centreline of the **rigging**.

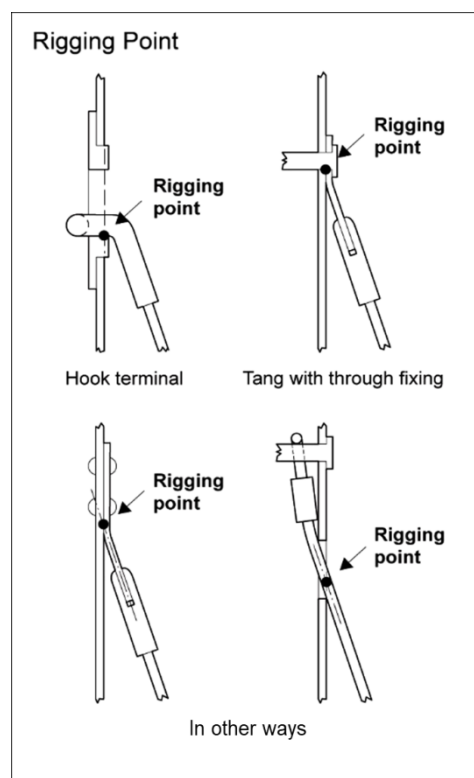

Current Position

As above

Reasons

1. The text and the drawing are not fully compatible. They are both updated to match the three main types of rigging point definitions.